

Professional Power Amplifier

AX SERIES POWER AMPLIFIER

OWNER'S MANUAL

TECHNICAL PARAMETER'S CHANGERS ARE NOT INFORMED.


PROFESSIONAL POWER AMPLIFIER

Our product is improving. When the external form and parameter changes, please refer to the material object. We will not inform you especially.

RL



1
2
3
4
5
6
7
8
9
10

Speaker

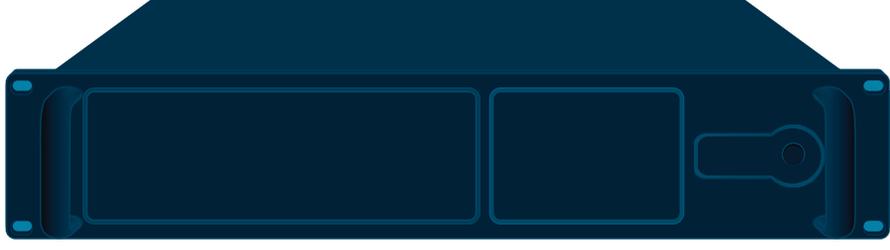

SPECIFICATIONS

	r
ModelM	†
Stereo power	8
1KHz0.1% THD	4
	2
Bridge mono Power	8
1KHz0.1% THD	4
Signal to noise	
Slew Rate	
Damping Factor	
Frequency response	+/-0.1dB, 20Hz+20kHz
THD	0.01% Rated Power@8 1kHz
IMD	0.01% Rated Power@8
Input sensitivity	0.775V, 1.0V, 1.55V
LPF	20Hz-180Hz Valid
HPF	130Hz-20KHzValid
Input impedance	10K/20K ohms, unbalanced or balanced
Input CMRR	-75dB
Cross talk	-70dB
LEP indicator	Signal, Protect, Dctive, Clip/Limiting
Main power supply	-220V 50/60Hz FUSE:T15A
Weight	25Kg
Dimensions(mm)	483Wx490Dx88H



A

2

3 A

XRL

PIN 1 Ground)2

+ PIN 2 Hot) 3

- PIN 3 Cold)

4 A

XRL

PIN 1 Ground)2

+ PIN 2 Hot) 3

- PIN 3 Cold)

5 B

(XRL)

PIN 1 Ground)2

+ PIN 2 Hot) 3

- PIN 3 Cold)

6 B

(XRL)

PIN 1 Ground)2

+ PIN 2 Hot) 3

- PIN 3 Cold)

7 B

35

8 /

1M

9

4 8

10

1

4

2

3

11 A/B

/

20-180Hz

)

AX

1

2

AX

3

AX

AX

90

88

AX

1 / /

/

2

3 A 20

4 A LED

)

LED CLIP

5 B LED

)

LED CLIP

6 B 20